




1836-8313 (22 mil)



1836-8314 (22 mil)

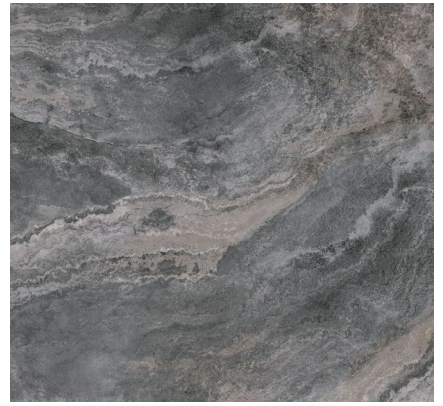

1836-8317 (22 mil)



748-5477 (22 mil)

### STANDARD TILE

- 18" x 36" Tile
- 3mm Gauge
- 22 mil Wear Layer
- Natural Stone
- Urethane Finish

### Technical Specifications

ASTM F 1700	Solid Vinyl Tile	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 204	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 (*modified)	Static Load	2,500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	22 mil
ASTM F 386	Overall Thickness	3mm

• The Grotto Collection comes standard in: 3mm with a 22 mil wear layer



**floorfolio®**

floorfolio.com • sales@floorfolio.com • (800) 671-1124  
3mm Grotto Collection © May 2023