


EQ EnviroQuiet® 4.0

EnviroQuiet 4.0 is an LVT with an integrated acoustic sound reducing system that yields an overall thickness of 5mm. The 8 mil clear wear layer provides long lasting durability in residential areas making it a great choice for multi-family and student housing. Upgrade to a 12 mil or 22 mil wear layer for increased durability. EnviroQuiet 4.0 meets and exceeds minimum building code and is specifically engineered for wood truss systems*.

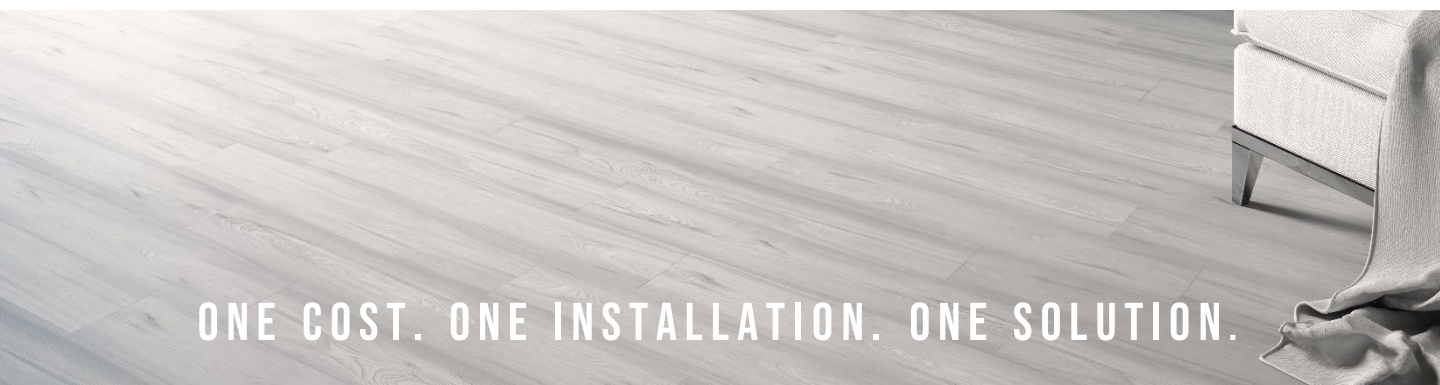

ONE COST. ONE INSTALLATION. ONE SOLUTION.

ASTM F 1700	Vinyl Tile Portion	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 2047	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 *modified	Static Load	500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	12 mil or 22 mil
ASTM F 386	Overall Thickness	5mm
ASTM E 989	Impact Noise	IIC > 50*

* IIC Ratings vary based on the floor/ceiling assembly. Please contact FloorFolio for technical data for your floor/ceiling assembly. EnviroQuiet 4.0 is not designed for concrete systems.

EnviroQuiet LVT is also available in 5.0 (Residential) and 6.0 (Commercial) Grade for both concrete and wood truss systems.

EnviroQuiet 4.0 Technical Specifications
sales@floorfolio.com | (800) 671-1124
floorfolio.com

Rev. 6/23

floorfolio®
 COMMERCIAL FLOORING