


floorfolio® 3mm CHEVRON COLLECTION



725-1621-1-B + 725-1621-2-B (8 mil)
725-1621-1-A + 725-1621-2-A (12 mil)




725-1622-1-B + 725-1622-2-B (8 mil)
725-1622-1-A + 725-1622-2-A (12 mil)

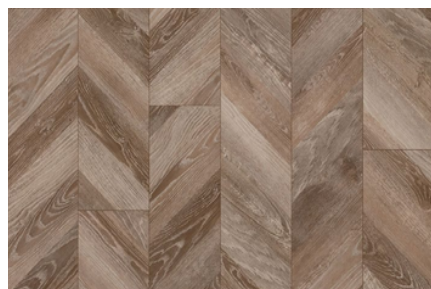

725-1623-1-B + 725-1623-2-B (8 mil)
725-1623-1-A + 725-1623-2-A (12 mil)



725-1627-1-B + 725-1627-2-B (8 mil)
725-1627-1-A + 725-1627-2-A (12 mil)

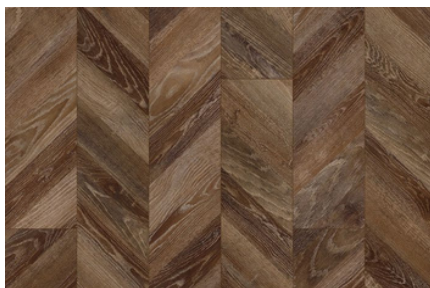

725-1628-1-B + 725-1628-2-B (8 mil)
725-1628-1-A + 725-1628-2-A (12 mil)

STANDARD PLANK

- 7.25" x 48" Plank
- 2mm Gauge
- 8 mil/12 mil Wear Layer
- Embossed Texture
- Urethane Finish



Installation Tip:

Plank 1 and Plank 2 will form the "V" shape when the planks are installed next to one another in a staggered formation.

Technical Specifications

ASTM F 1700	Solid Vinyl Tile	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 2047	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 (*modified)	Static Load	2,500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	8 mil / 12 mil
ASTM F 386	Overall Thickness	2mm

- The Chevron Collection comes standard in: 3mm with a 22 mil wear layer
- Special Order (minimums apply): 2mm with an 8 or 12 mil wear layer



floorfolio®

floorfolio.com | sales@floorfolio.com | (800) 671-1124
2mm Chevron Collection © Jan 2025