


floorfolio® 3mm CHEVRON COLLECTION



Plank (1): 725-1621-1 (22 mil)
Plank (2): 725-1621-2 (22 mil)




Plank (1): 725-1622-1 (22 mil)
Plank (2): 725-1622-2 (22 mil)

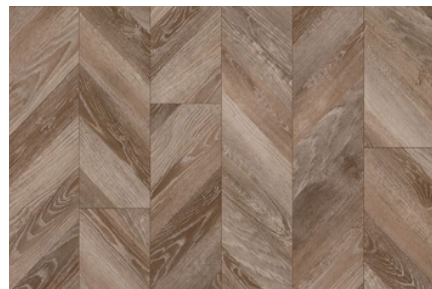

Plank (1): 725-1623-1 (22 mil)
Plank (2): 725-1623-2 (22 mil)



Plank (1): 725-1627-1 (22 mil)
Plank (2): 725-1627-2 (22 mil)

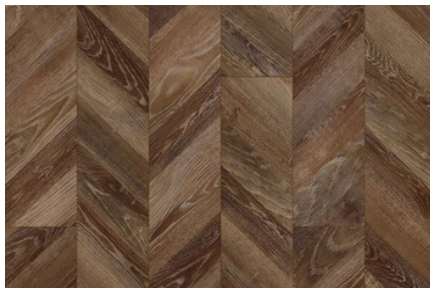

Plank (1): 725-1628-1 (22 mil)
Plank (2): 725-1628-2 (22 mil)

STANDARD PLANK

- 7.25" x 48" Plank
- 3mm Gauge
- 22 mil Wear Layer
- Embossed Texture
- Urethane Finish



PLANK 1



PLANK 2

Installation Tip:

Plank 1 and Plank 2 will form the "V" shape when the planks are installed next to one another in a staggered formation.

Technical Specifications

ASTM F 1700	Solid Vinyl Tile	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 2047	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 (*modified)	Static Load	2,500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	22 mil
ASTM F 386	Overall Thickness	3mm



floorfolio®

floorfolio.com • sales@floorfolio.com • (800) 671-1124
3mm Chevron Collection © Jan 2025

• The Chevron Collection comes standard in: 3mm with a 22 mil wear layer
• Special Order (minimums apply): 2mm with an 8 or 12 mil wear layer