



floorfolio®

3mm CRETE II COLLECTION



2424-5343 (22 mil)



2424-5345 (22 mil)



2424-5347 (22 mil)



2424-5340 (22 mil)


STANDARD TILE

- 23.62" x 23.62" Tile
- 3mm Gauge
- 22 mil Wear Layer
- Concrete Emboss
- Urethane Finish

Technical Specifications

ASTM F 1700	Solid Vinyl Tile	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 2047	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 (*modified)	Static Load	2,500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	22 mil
ASTM F 386	Overall Thickness	3mm

• The Crete II Collection comes standard in: 3mm with a 22 mil wear layer.

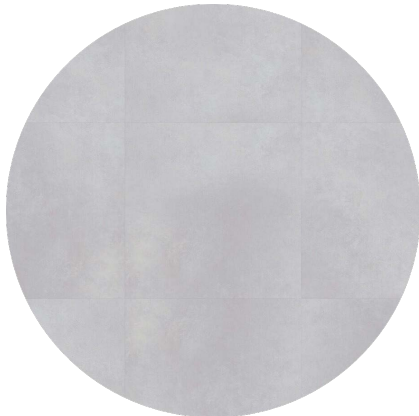

floorfolio®