

floorfolio®

2mm ZEN COLLECTION




748-1701-B-SM (8 mil)
748-1701-A-SM (12 mil)



748-1711-B-SM (8 mil)
748-1711-A-SM (12 mil)




748-1713-B-SM (8 mil)
748-1713-A-SM (12 mil)

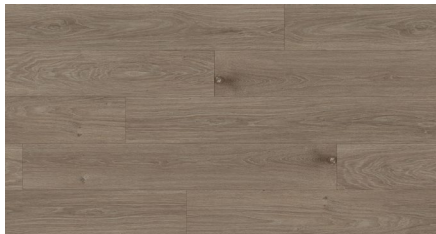


748-1717-B-SM (8 mil)
748-1717-A-SM (12 mil)




748-1721-B-SM (8 mil)
748-1721-A-SM (12 mil)

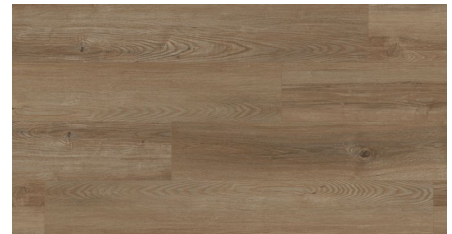

748-1724-B-SM (8 mil)
748-1724-A-SM (12 mil)

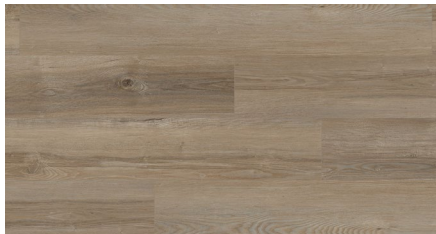

748-1726-B-SM (8 mil)
748-1726-A-SM (12 mil)

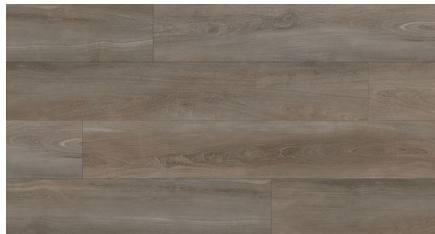

748-8938-B-SM (8 mil)
748-8938-A-SM (12 mil)

STANDARD PLANK

- 7" x 48" Plank
- 2mm Gauge
- 8 mil or 12 mil Wear Layer
- Smooth Texture
- Urethane Finish

Technical Specifications

ASTM F 1700	Solid Vinyl Tile	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 2047	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 (*modified)	Static Load	2,500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	8 mil or 12 mil
ASTM F 386	Overall Thickness	2mm

- The Zen Collection comes standard in: 2mm with an 8 mil wear layer
- Special Order (minimums apply): 2mm with a 12 mil wear layer | 3mm with a 22 mil wear layer | EnviroQuiet



floorfolio®