



725-1701 (22 mil)



725-1711 (22 mil)



725-1713 (22 mil)



725-1717 (22 mil)




725-1721 (22 mil)



725-1724 (22 mil)



725-1726 (22 mil)

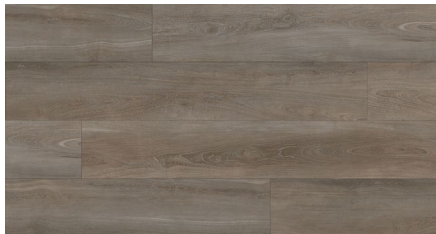

725-8938 (22 mil)

### STANDARD PLANK

- 7.25" x 48" Plank
- 3mm Gauge
- 22 mil Wear Layer
- Smooth Texture
- Urethane Finish

### Technical Specifications

ASTM F 1700	Solid Vinyl Tile	Class III, Type A or B, Pass
ASTM E 662	Smoke Density	Pass
ASTM E 648	Fire Resistance	Class 1
ASTM D 2047	Coefficient of Friction	Pass
ASTM F 970	Static Load	250 PSI
ASTM F 970 (*modified)	Static Load	2,500 PSI
ASTM F 925	Chemical Resistance	Pass
ASTM F 410	Wear Layer Thickness	22 mil
ASTM F 386	Overall Thickness	3mm

- The Zen Collection comes standard in: 2mm with an 8 mil wear layer
- Special Order (minimums apply): 2mm with a 12 mil wear layer | 3mm with a 22 mil wear layer | EnviroQuiet



**floorfolio®**

floorfolio.com • sales@floorfolio.com • (800) 671-1124  
3mm Zen Collection © May 2023